



INDUSTRIES WE SERVE



DYNAMO ENGINEERING LLP.

📍 54, Jay Industrial Park,
Off S. P. Ring Road,
Near to Nana Chiloda Circle,
Ahmedabad 382 330, Gujarat, India.

☎ +91 90995 42019

✉ info@dynamoengineering.com

Follow Us



DynaFlow Jumbo Junior+

SOLUTION FOR EMPTYING FIBC BAG
FAST | EASY | SAFE | ACCURATE

🌐 www.dynamoengineering.com

FIBC WITHOUT DISCHARGE SPOUT

HOW TO USE?

Step:1

Place **Jumbo Junior+** on a flat surface. Lift the jumbo bag & bring above the **Jumbo Junior+** at convenient location.



Step:2

Lower the jumbo bag onto the **Jumbo Junior+**. It will penetrate the jumbo bag completely. Then raise the bag again.



Step:3

Pull down the **Jumbo Junior+** slightly with rotating motion so that it locks inside the jumbo bag.



Step:4

Jumbo Junior+ is ready to operate. Open and close the valve to avail desired flow of material.



FIBC WITH DISCHARGE SPOUT

HOW TO USE?

Step:1

Free the discharge spout by unlocking the first knot and insert **Jumbo Junior+** from the bottom.




Step:2

Place and Lock the Metal clamp on the **Jumbo Junior+** so that it overlaps and sits on the wedges.




Step:3

Fabric of discharge spout is perfectly fixed between the clamp and **Jumbo Junior+**. open the second knot to allow material in the Dispenser. Operate the valve to avail desired flow of material.

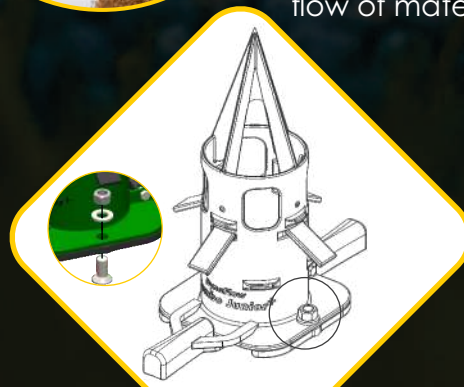

PRODUCT HIGHLIGHTS



Reinforced sharp tip for easy penetration of FIBC Bag.

Flexible handle with ergonomic design.



Rugged hardware for strength and stability.

Precisely shaped wedges for locking clamp to provide maximum grip with fabric of unloading spout.



Zinc cladded clamp with easy lock for attachment with unloading spout.

PRODUCT DETAILS

Body material	Engineering plastic
Fastener material	Stainless Steel
Avg. material flow	150 to 650 kg / minute (Depending on density)
Dimensions	45 cm X 22 cm X 22 cm
Weight	2050 g
Country of origin	India



*Against manufacturing defects only.